



Magnetic Strip for **Double GLAZING** and insect screens

FlyMag Double Glazing Instructions

What you'll need:

A cleaning cloth, sharp craft knife, alcohol based cleaner, a flat cutting surface larger than the window that is safe to cut on.

The Included A&B magnetic strips:

Magnet Part A

no groove

(Mounts to the window/frame)

Magnet Part B

groove

(Mounts to the acrylic panel)

Preparation:


Thoroughly clean your window frames. We recommend an alcohol based cleaner to ensure a good bonding of the magnetic strips.



Step 1:


Measure your window frames and cut **Magnet Part A** strips into lengths to suit – trim them at a 45° angle in the corners for a snug and tidy fit. Once you have your lengths, you can remove the **red plastic backing** from the strips and adhere them to the window frames.

Pro Tip! You don't have to remove the whole red backing at once... Start with a small section at one end, and remove the backing as you apply the strip.

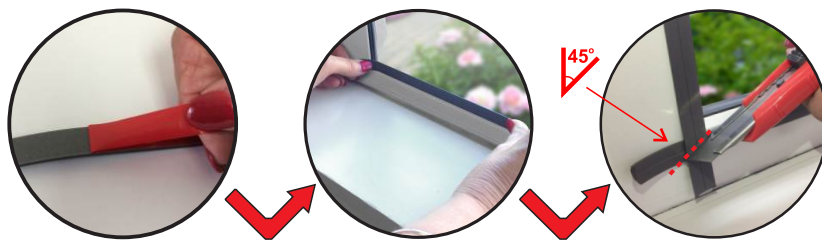

Step 2:

Starting from one end, lay the **Magnet Part B** strips over the top of your mounted Part A strips to copy the measurements. Ensure the red tape faces you and that the strips have gone down evenly over the Part A strips. Then trim again at 45° angles in the corners.

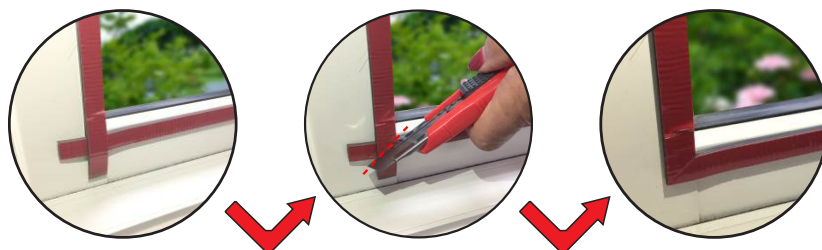

Step 3:

Remove the red backing tape from the entire frame to expose the adhesive. Place the pre-cut Acrylic sheet on top of **Part B** pressing evenly and firmly to give the VHB adhesive a good bond. Carefully & slowly remove the Acrylic panel with **Part B** attached to it. **Place on firm surface & apply weight to it overnight to allow the VHB time to cure to the panel.** Fit to window the next day.

